



PHOENIX GOLD



INSTRUCTION MANUAL PLUG & PLAY DSP AMPLIFIER


IMPORTANT: Technical knowledge is necessary for installation. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. Phoenix Gold can not be held responsible for the installation of this product.

PHOENIXGOLD.COM


INSTRUCTION MANUAL

Prior to installation the vehicle battery should be disconnected so no power is running to any of the electrics in the vehicle.


STEP 1

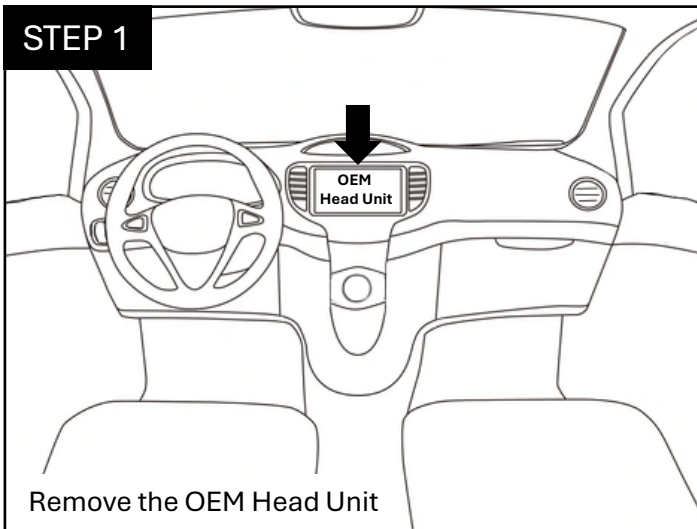

STEP 2

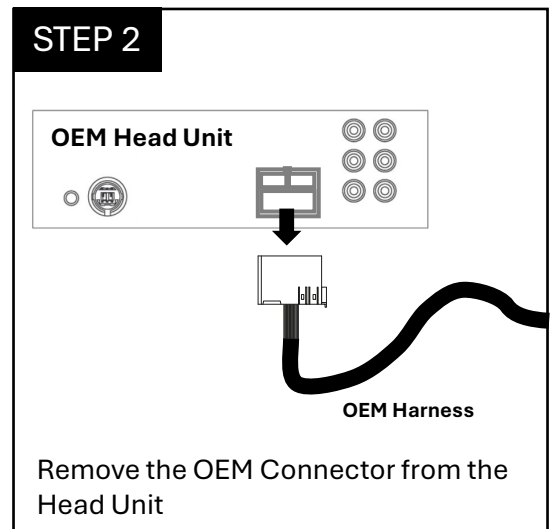

STEP 3

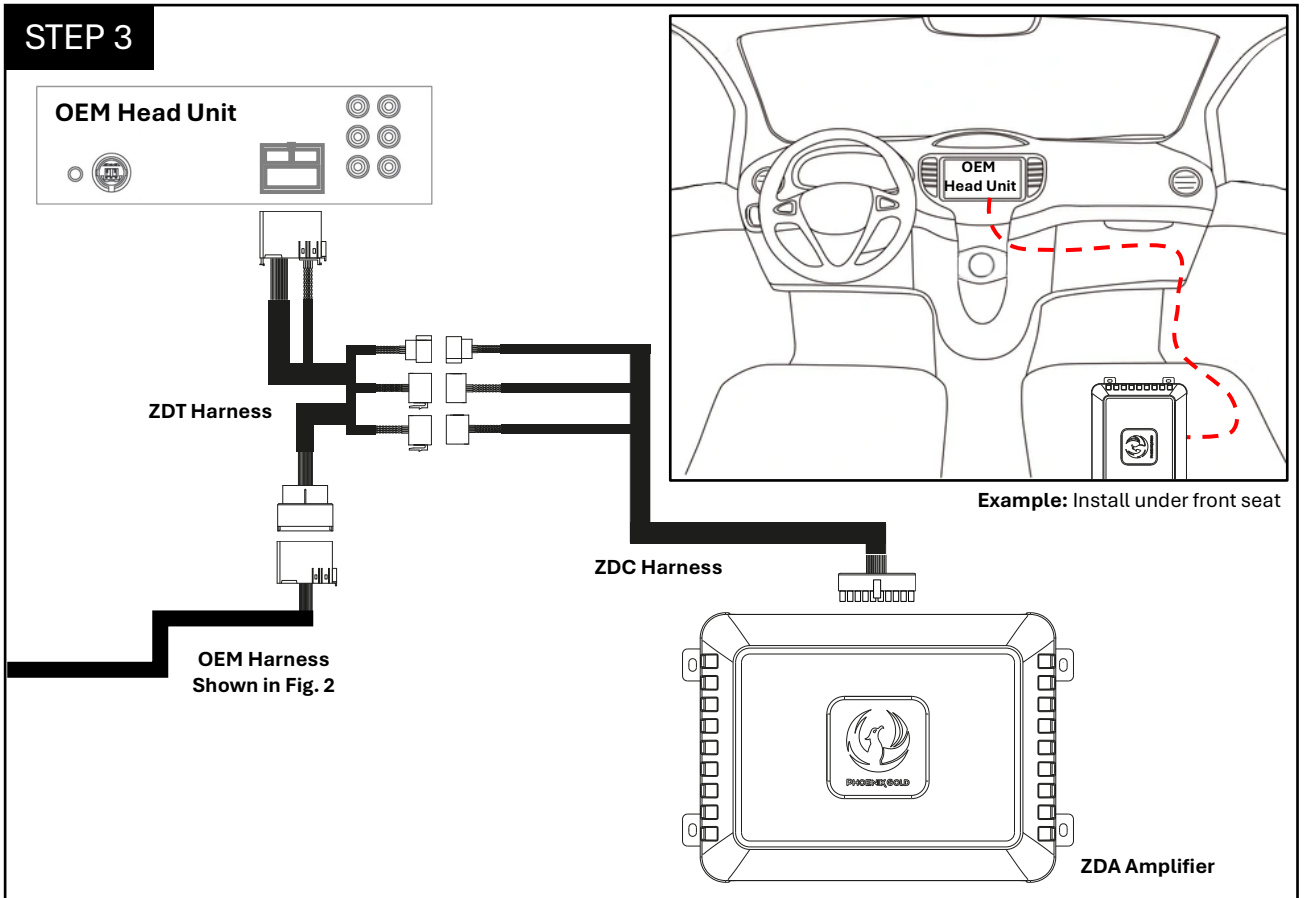

1. Connect the ZDT harness to the rear of the OEM head unit.
2. Connect the ZDT harness to the ZDC harness as shown in the above diagram.
3. Run the ZDC harness from behind the OEM head unit through the back of the dashboard to the location of where you will position your amp. We would advise installing the ZDA amp under the seat or in the boot of the vehicle.

NOTE: The information show above is a guide ONLY to installing the ZDA Amp under the passenger seat. Please be advised that we would also recommend a trained professional auto electrician carry out the install of any of our products.